


# Type : LP033482A


## Specifications

Nominal voltage		3.6V	
Capacity (mAh)		0.2C Discharge	
	Minimum	650mAh <sup>2</sup>	
	Typical <sup>3</sup>	600mAh	
Dimensions		mm	inch
	Thickness	4.0 <sup>0</sup> <sub>-0.5</sub>	0.157 <sup>0</sup> <sub>-0.020</sub>
	Width	34.0 <sup>0</sup> <sub>-1.0</sub>	1.339 <sup>0</sup> <sub>-0.039</sub>
	Height	82.0 <sup>0</sup> <sub>-1.0</sub>	3.228 <sup>0</sup> <sub>-0.039</sub>
Weight*		Grams	Ounces
		24g	0.85
Internal impedance* at 1000Hz.		<150m (After charge)	
Charge	Standard	325mA(0.5C) × 5hrs	
	Rapid	650mA(1C) × 2.5hrs	
Ambient temperature	Charge	C	F
		0° C to 45° C	32° F to 113° F
	Discharge	-20° C to 60° C	-4° F to 140° F
	Storage	-20° C to 45° C	-4° F to 113° F

## Charge characteristics

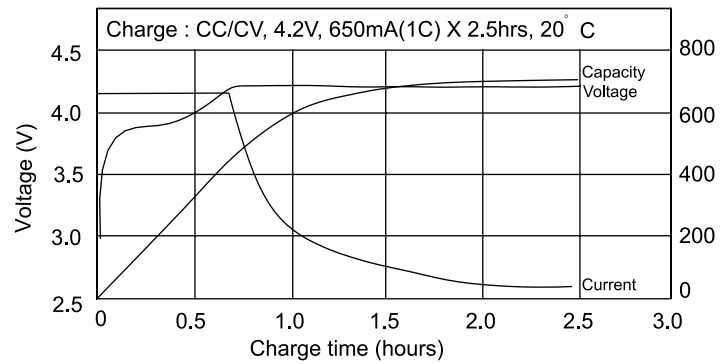


## Discharge characteristics

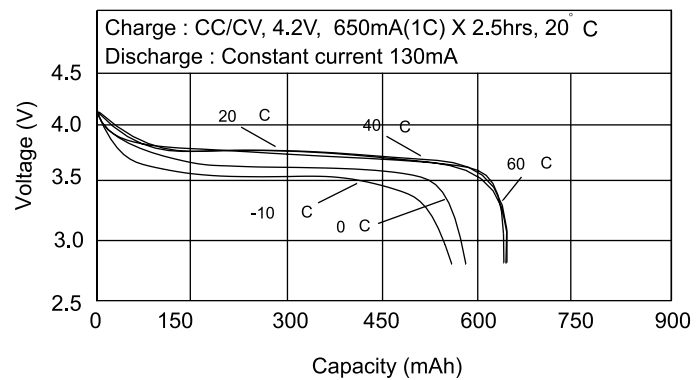

## Dimensions (bare cell)


(mm)

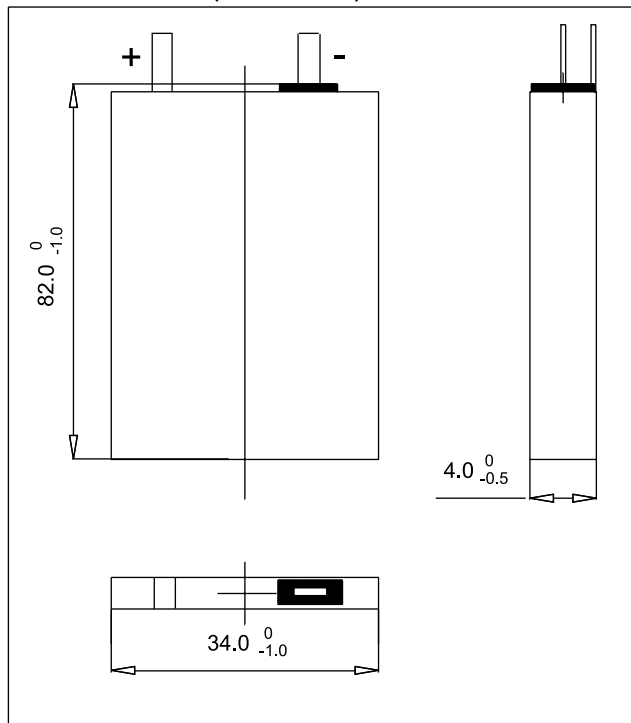

### Note:

1. After charging at 0.5C for 5 hours.
  2. Nominal capacity, rated at 0.2C, 20° C.
  3. Average capacity. For reference only.
- \*. Weight and internal impedance are for reference.

## Cycle life characteristics

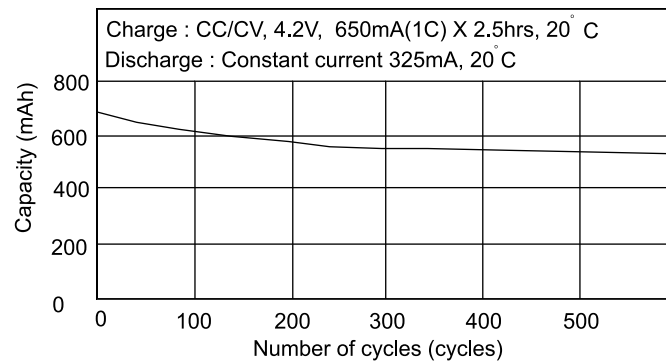

## Storage characteristic

